



# LED - COMMANDER

## Features


- Up to 254 points of light controllable
- Control via power cable (230 VAC)
- Single light spot selection or a complete line of spots
- 1 slave-module per spot, 1 master-module per line
- Dimm values 0-100%
- Timer with multiple switching times
- Input for dawn sensor
- Input for motion sensor
- Control via SMS (GPRS, mobile) perspectively

## Optional

- Master: DALI, EIB/KNX, DMX,
- Slave: DALI, EIB/KNX, DMX, RC5
- Adjustment of input voltage from 12-230 V (isolated and non isolated)
- Adjustment of output voltage 12-150 V (max. 2 A per each)
- Bidirectional communication, i.e. analysis of every single spot possible

## Application

- Streetlighting
- Interior lighting (office, warehouse, home)
- Industry lighting
- Outside lighting

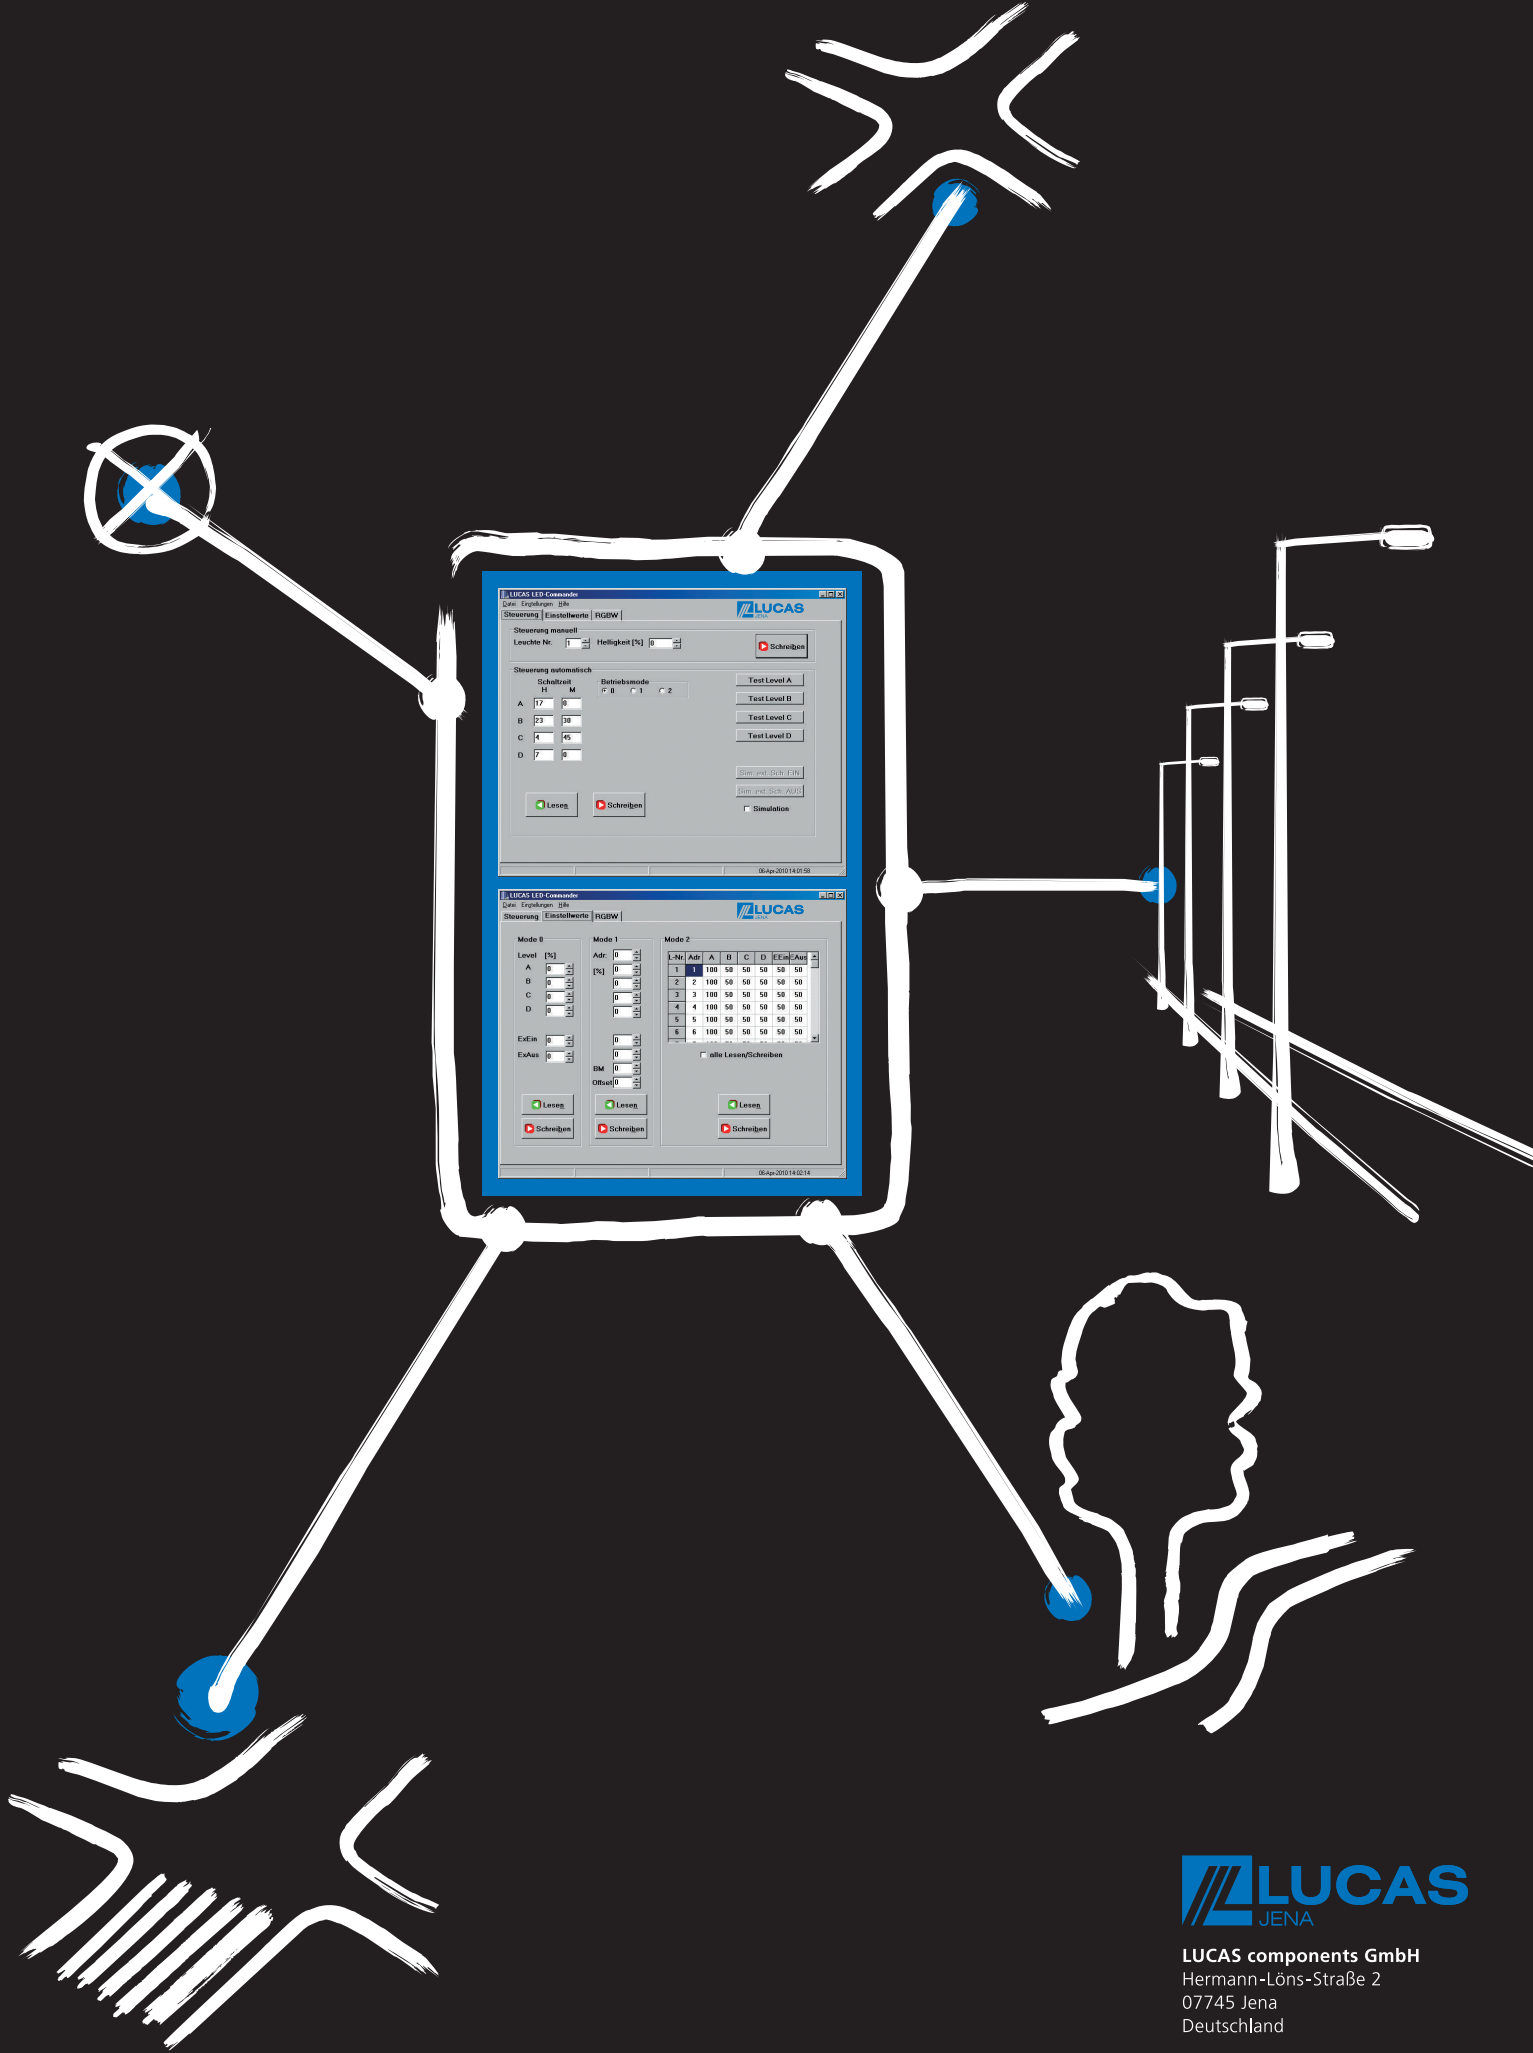

**LUCAS components GmbH**  
 Hermann-Löns-Straße 2  
 07745 Jena  
 Deutschland

phon: + 49(0) 36 41-66 86-139  
 fax: + 49(0) 36 41-66 86-124

components@lucas-jena.de  
 www.lucas-jena.de